

P-Life America Latina P-Life[™] Biodegradable Plastic Technology

ANALYSIS REPORT

General information		
		Date: September 14, 2015
Analysis number:	Q-020915F136	
Client:	Straw Plast	
Analysis period:	02-09-2015/11-09-	
Test Description:	Accelerated Photo	degradation
I Sample Description:		
Client PLife with Red a	5 Straw :: Straw Plast 1% SMC 100 nd white Pigment	
II Objective:		
	g to; "Tensile Test" ASTM D	the structure and determination of its 3826-98, "Standard Practice for Exposure
III Laboratory equipme	<u>nt:</u>	
a) Universal Testingb) QUV accelerated		Continues of UV at 50°C and 0.70 W/m2-

Guadalajara, Jalisco, México




$\begin{array}{l} P\text{-Life America Latina}\\ P\text{-Life}^{^{TM}} & Biodegradable \ Plastic \ Technology \end{array}$

IV.- <u>Results:</u>

MECHANICAL PROPERTIES

For this study we decided to analyze the results of the maximum force supported because it was the most significant data.

	Maximum Force Supported (Newton)	
Days in the oven	A5. Straw	
0	73.96	
3	64.47	
5	51.63	
7	34.16	
9	23.02	
11	11.74	
12	4.26	

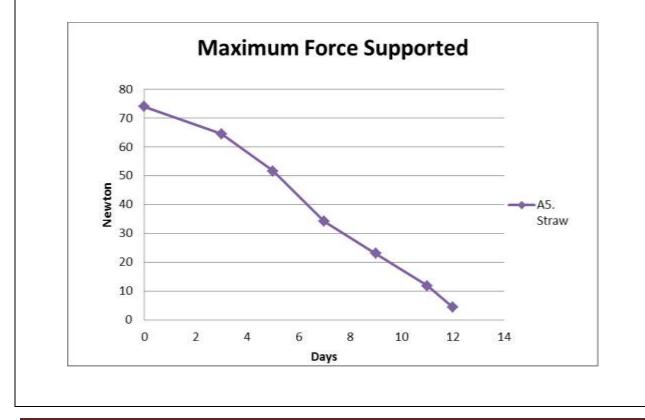

Guadalajara, Jalisco, México


info@plifela.com



$\begin{array}{l} P\text{-Life America Latina}\\ P\text{-Life}^{\text{TM}} & Biodegradable \ Plastic \ Technology \end{array}$

QUALITATIVE ANALYSIS

		Sample
		A.5 Straw
Stage		Days
		0
1	The sample enters to study.	
		5
2	Maintains Physical Properties.	
	The structure changes his initial	7
3	properties (color, hardness)	
		11
4	The product is broken easily.	
	The degradation process has	12
5	finished.	

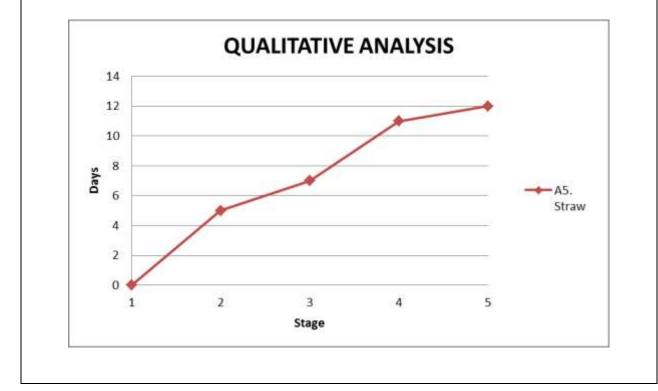

Guadalajara, Jalisco, México

info@plifela.com



P-Life America Latina P-LifeTM Biodegradable Plastic Technology

V.- Conclusions:

A.5 Straw

After exposing the sample to the accelerated aging process, the change in mechanical and physical properties were also clearly observed.

It is considered that the period of useful life ends by losing more than 50% of the initial force supported, that took place after 7 days of exposure. Therefore, it is determined that a shelf life of Sample M1 is considered to be 17 months (1 year with 5 months) under 30°C warehouse environment.

Based on ASTM D5510-94 is considered that the sample has reached its accelerated degradation, when it support less than 5% of force that happened after 12 days of study therefore we concluded that this sample has a **degradation time of 30 months (2 year with 6 months).**

Please be advised that 1 day of study shall be converted into 2.5 months under 30°C environment. The conversion rate is calculated based on Arrhenius Activation Energy.

Please be also advised that the determination of shelf life time as 50% retained property is based on our long term experiences we have been conducting a degradation test for a number of customers throughout the worldwide region.

Ing. Martha Castillo Cruz

Guadalajara, Jalisco, México

info@plifela.com



P-Life America Latina P-Life[™] Biodegradable Plastic Technology

ANNEX IMAGE



Illustration 1. Laboratory equipment



Illustration 2. Sample A.5 after 5 days of study.



P-Life America Latina P-LifeTM Biodegradable Plastic Technology




Illustration 3. Sample A.5 after 7 days of study



Illustration 4. Sample A.5 after 11 days of study



Illustration 5. Sample A.5 after 12 days of study

6